### **ZB5AL434**

Projecting push button head 40mm, Harmony XB5, plastic, red, 22mm, spring return, marked STOP





#### Main

Range of product	Harmony XB5
Product or component type	Head for non-illuminated push-button
Device short name	ZB5
Bezel material	Dark grey plastic
Mounting diameter	22 mm
Head type	Standard
Sale per indivisible quantity	1
Shape of signaling unit head	Round
Type of operator	Spring return
Operator profile	Red projecting, STOP (white)

#### Complementary

Device presentation	Basic element
	SR1 for <3 contacts using single blocks in rear mounting
, , , , , , , , , , , , , , , , , , ,	SF1 for <3 contacts using single blocks in front mounting
	C15 for <1 contacts using single blocks in front mounting
	C11 for <3 contacts using single blocks in front mounting
	C2 for <9 contacts using single and double blocks in front mounting
Electrical composition code	C1 for <9 contacts using single blocks in front mounting
	XALK 25 cut-outs
Station name	XALD 15 cut-outs
Mechanical durability	10000000 cycles
Net weight	0.019 kg
'	
CAD overall depth	33 mm
CAD overall height	29 mm
CAD overall width	29 mm

#### **Environment**

Protective treatment	TH
Ambient air temperature for storage	-4070 °C
Ambient air temperature for operation	-4070 °C
Overvoltage category	Class II conforming to IEC 60536
IP degree of protection	IP66 conforming to IEC 60529 IP67 IP69 IP69K
NEMA degree of protection	NEMA 13 NEMA 4X
Resistance to high pressure washer	7000000 Pa at 55 °C, distance : 0.1 m
IK degree of protection	IK03 conforming to IEC 50102
Standards	UL 508 IEC 60947-1 IEC 60947-5-1 CSA C22.2 No 14 IEC 60947-5-4 JIS C8201-5-1 JIS C8201-1


The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not interested for a set of or determining suitability or intelability of these products for specific user applications. It is the documentation is not integrator to perform the appropriate and complete risk analysis, evaluating of the products with respect to the relevant specific application or use thereof. Neither Schmeider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

ation = 18 ms) for half sine wave acceleration conforming to IEC 7 ation = 11 ms) for half sine wave acceleration conforming to IEC 7500 Hz) conforming to IEC 60068-2-6
500 Hz) conforming to IEC 60068-2-6
mium product
n Declaration
compliance (Product out of EU RoHS legal scope)
RoHS Declaration
RoHS Declaration
RoHS Declaration  et Environmental Profile  f Life Information
ct Environmental Profile  f Life Information  S: This product can expose you to chemicals including: Di-isodecyl ph
et Environmental Profile  f Life Information  G: This product can expose you to chemicals including: Di-isodecyl phopp), which is known to the State of California to cause birth defects of the control of the State of California to cause birth defects of the California to cause birth

# Product data sheet Dimensions Drawings


## **ZB5AL434**

#### **Dimensions**



#### Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)


Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board

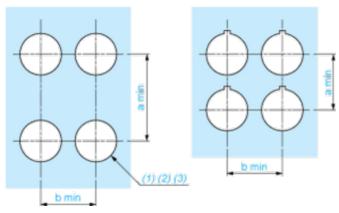

- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3) Ø22.5 mm recommended (Ø22.3  $_0$  <sup>+0.4</sup>) / Ø0.89 in. recommended (Ø0.88 in.  $_0$  <sup>+0.016</sup>)

Connections	a in mm	a in in.	b in mm	b in in.
By screw clamp terminals or plug-in connector	40	1.57	30	1.18
By Faston connectors	45	1.77	32	1.26
On printed circuit board	30	1.18	30	1.18


#### **Detail of Lug Recess**



- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3) Ø22.5 mm recommended (Ø22.3  $_0$  <sup>+0.4</sup>) / Ø0.89 in. recommended (Ø0.88 in.  $_0$  <sup>+0.016</sup>)

Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection

#### Panel Cut-outs (Viewed from Installer's Side)

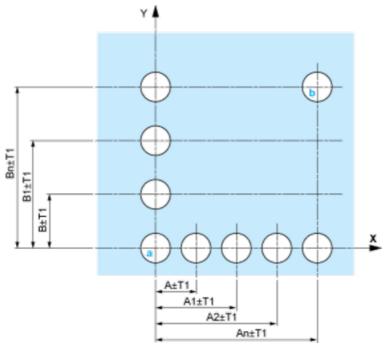


A: 30 mm min. / 1.18 in. min.

B: 40 mm min. / 1.57 in. min.

#### Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm

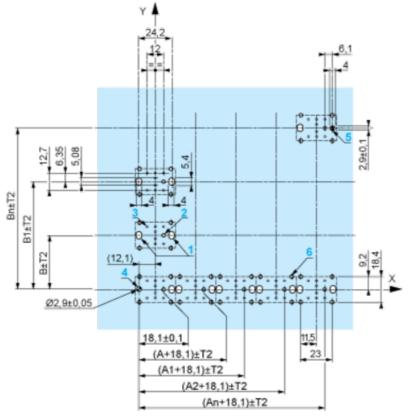

A: 30 mm min.

B: 40 mm min.

Dimensions in in.



A: 1.18 in. min. B: 1.57 in. min.

#### General Tolerances of the Panel and Printed Circuit Board

The cumulative tolerance must not exceed 0.3 mm / 0.012 in.: T1 + T2 = 0.3 mm max.

#### **Installation Precautions**

- Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB5AZ009: ± 2°30' (excluding cut-outs marked a and b).
- Tightening torque of screws ZBZ006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB5AZ079 fixing collar/pillar and its fixing screws:
  - $\circ \quad$  every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
  - o with each selector switch head (ZB5AD•, ZB5AJ•, ZB5AG•).

The fixing centers marked a and b are diagonally opposed and must align with those marked 4 and 5.



- (1) Head ZB5AD•
- (2) Panel
- (2) Nut

#### Mounting of Adapter (Socket) ZBZ01•

- 1 2 elongated holes for ZBZ006 screw access
- 2 1 hole Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 for centring adapter ZBZ01•
- 3 8 × Ø 1.2 mm / 0.05 in. holes
- 4 1 hole Ø 2.9 mm ± 0.05 / 0.11 in. ± 0.002, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- 6 4 holes Ø 2.4 mm / 0.09 in. for clipping in adapter ZBZ01•

Dimensions An + 18.1 relate to the Ø 2.4 mm  $\pm$  0.05 / 0.09 in.  $\pm$  0.002 holes for centring adapter ZBZ01•.

## **ZB5AL434**

Electrical Composition Corresponding to Code C1
Floatrical Composition Corresponding to Code C2
Electrical Composition Corresponding to Code C2
Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1
Electrical Composition Corresponding to Code C15
1 N/O
1 N/C

1 N/O + N/C or 1 N/O + N/O or 1 N/C + N/C

Legend		
Single contact		
Double contact		
Light block		
Possible location		