

# XGFEC540

Radio frequency identification XG, field expander conveying type, Sn 30...90 mm, 400 x 23 x 50 mm



## Main

Range of product	Telemecanique Radio frequency identification XG
Accessory / separate part type	Field expander
Product specific application	Conveyor system
Product compatibility	XGCS4901201 + XGHB440245 XGCS4901201 + XGHB90E340 XGCS4901201 + XGHB520246 XGCS4901201 + XGHB320345 XGCS4901201 + XGHB320246
Accessory / separate part destination	Station with associated label
[Sn] nominal sensing distance	30...90 mm

## Complementary

Accessory dimension	400 x 23 x 50 mm
---------------------	------------------

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	8.500 cm
Package 1 Width	8.500 cm
Package 1 Length	54.500 cm
Package 1 Weight	812.000 g
Unit Type of Package 2	S04
Number of Units in Package 2	12
Package 2 Height	30 cm
Package 2 Width	40 cm
Package 2 Length	60 cm
Package 2 Weight	10.734 kg

## Offer Sustainability


Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
For all Reach Rohs enquiries contact us at	<a href="mailto:sustainability@tesensors.com">sustainability@tesensors.com</a>

## Contractual warranty

Warranty	18 months
----------	-----------

## Dimensions


### Field Expanders

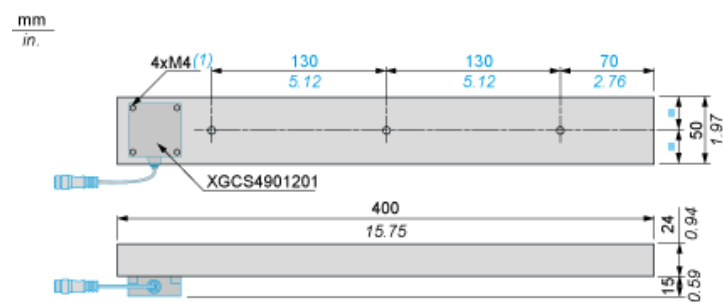

(1) 4 x M4 screws

## Minimum Mounting Distances


### Distance Between Field Expanders



Tag	e1	e2	e3
XGHB90E340 XGHB520246	195	285	195
XGHB320345	420	540	450

## Minimum Mounting Distances in a Metal Structure


### Distance Between Field Expanders



Field expanders	
e (mm)	h (mm)
15	30

Curves


Dialogue Zones for Field Expanders

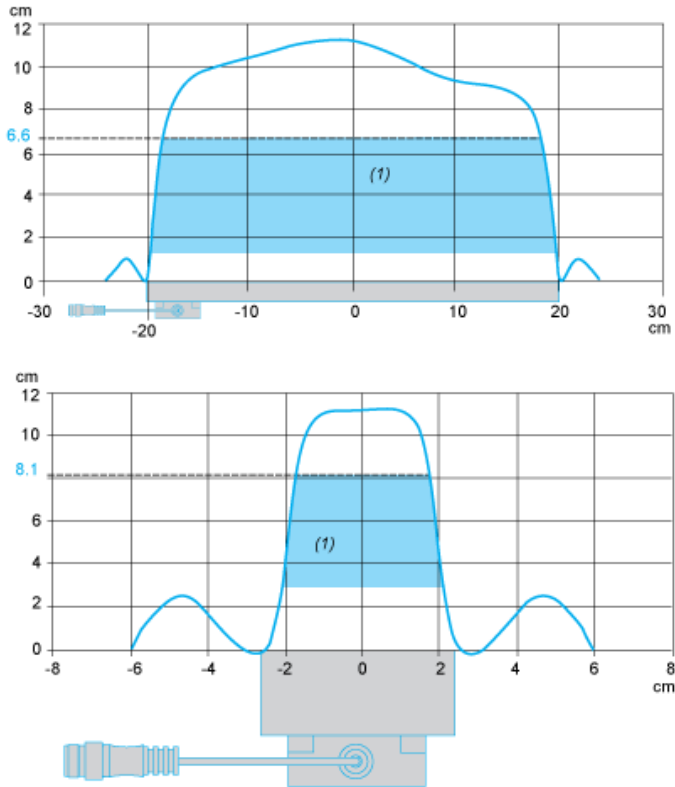


(1) Recommended working zone.

Curves

Dialogue Zones for Field Expanders

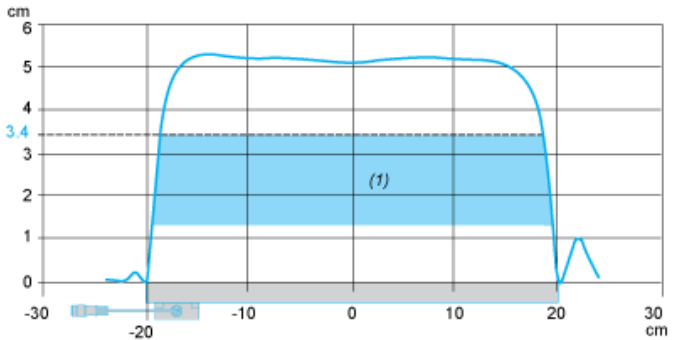

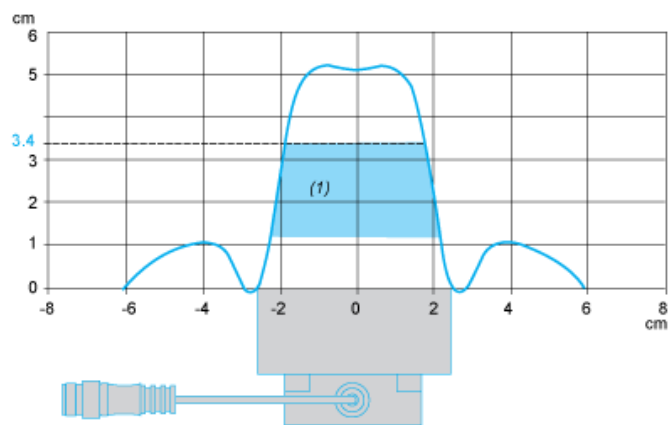

(1) Recommended working zone.