

## Product data sheet

### Characteristics

# XUSZWPE165

Telemecanique Safety light curtains XUSL,  
Protective screen 1695 mm for light curtains



### Main

Range of product	Telemecanique Safety light curtains XUSL
Accessory / separate part category	Protection accessories
Accessory / separate part type	Protective screen
Product compatibility	XUSL.E...166
Accessory / separate part destination	Safety light curtain type 4 Safety light curtain type 2
Height	1695 mm
Quantity per set	Set of 4

### Complementary

Material	Polycarbonate
Sensing distance reduction coefficient	0.97 Sn
Net weight	0.68 kg




### Environment

Resistance to chemical agents	Resistant alkalis Resistant to inorganic diluted acids Resistant aqueous solutions Resistant detergents and cleaners
Ambient air temperature for operation	-10...55 °C -10...55 °C
Ambient air temperature for storage	-25...70 °C -25...70 °C

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	14.0 cm
Package 1 Width	20.0 cm
Package 1 Length	181.0 cm
Package 1 Weight	2.3 kg

### Offer Sustainability


Sustainable offer status	Green Premium product
REACH Regulation	 <a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	 <a href="#">Yes</a>

Contractual warranty

Warranty	18 months
----------	-----------

## Mounting and Clearance

### Various Stages in the Protective Screen Assembly

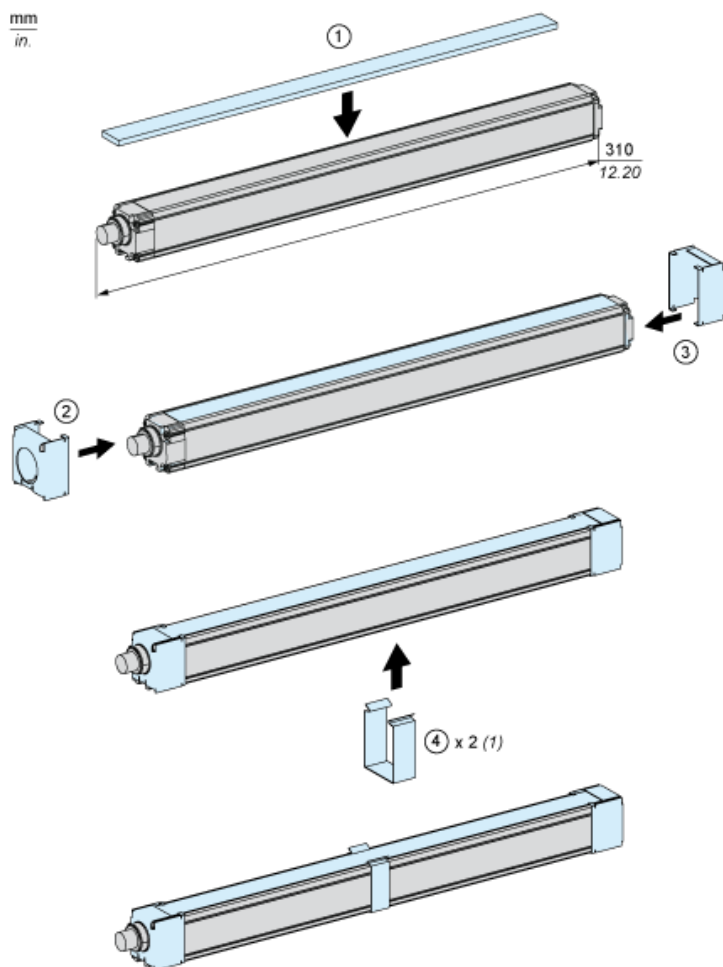

(1) Depending on the length