

# XUM2ANXBL2

Photoelectric sensors XU, miniature, thru beam, Smax=30 m, system, NPN, cable 2 m



## Main

Range of Product	Telemecanique Photoelectric sensors XU
Series name	General purpose single mode
Electronic sensor type	Photo-electric sensor
Sensor name	XUM
Sensor design	Miniature
Detection system	Thru beam
Material	Plastic
Type of output signal	Discrete
Supply circuit type	DC
Wiring Technique	3-wire
Discrete output type	NPN
Discrete output function	1 NO or 1 NC programmable
Electrical connection	Cable
Cable length	6.56 ft (2 m)
Emission	Red LED thru beam
[Sn] nominal sensing distance	65.62 ft (20 m)

## Complementary

Enclosure Material	PBT
Lens material	PMMA
Maximum sensing distance	98.43 ft (30 m)
Output Type	Solid state
Wire insulation material	PVC
Status LED	Supply on 1 LED green) Receiver/Output 1 LED orange) Receiver/supply on 1 LED green)
[Us] rated supply voltage	12...24 V DC reverse polarity protection
Supply voltage limits	10...30 V DC
Switching capacity in mA	<= 100 mA overload and short-circuit protection
Switching frequency	<= 1000 Hz
Maximum voltage drop	<2 V
Current consumption	20 mA for transmitter 20 mA for receiver
Maximum delay first up	100 ms
Maximum delay response	0.5 ms
Maximum delay recovery	0.5 ms
Setting-up	Sensitivity by potentiometer
Depth	0.79 in (20 mm)
Height	1.30 in (33 mm)
Width	0.39 in (10 mm)
Net Weight	0.26 lb(US) (0.119 kg)
Kit composition	Transmitter + receiver XUM2AKXBL2T + XUM2ANXBL2R

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither TWSS Holding nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Environment

Product Certifications	cULus[RETURN]CE[RETURN]UKCA
Ambient Air Temperature for Operation	-22...131 °F (-30...55 °C)
Ambient Air Temperature for Storage	-40...158 °F (-40...70 °C)
Relative humidity	35...95 %
Immunity to ambient light	40000 Lux sunlight 10000 lux incandescent light
Vibration resistance	9 gn +/- 1.5 mm 10...500 Hz)for every axis IEC 60068-2-6
Shock resistance	100 gn 11 ms) for every axis IEC 60068-2-27
IP degree of protection	IP67 IEC 60529 IP65 IEC 60529

## Ordering and shipping details

Category	US10DS222481
Discount Schedule	0DS2
GTIN	3389110755893
Returnability	Yes
Country of origin	JP

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	0.98 in (2.5 cm)
Package 1 Width	4.72 in (12 cm)
Package 1 Length	4.92 in (12.5 cm)
Package 1 Weight	3.35 oz (95 g)
Unit Type of Package 2	S04
Number of Units in Package 2	80
Package 2 Height	11.81 in (30 cm)
Package 2 Width	15.75 in (40 cm)
Package 2 Length	23.62 in (60 cm)
Package 2 Weight	20.37 lb(US) (9.238 kg)

## Offer Sustainability


California proposition 65	WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
For all Reach Rohs enquiries contact us at	<a href="mailto:sustainability@tesensors.com">sustainability@tesensors.com</a>

## Contractual warranty

Warranty	18 months
----------	-----------


## Dimensions

### Transmitter

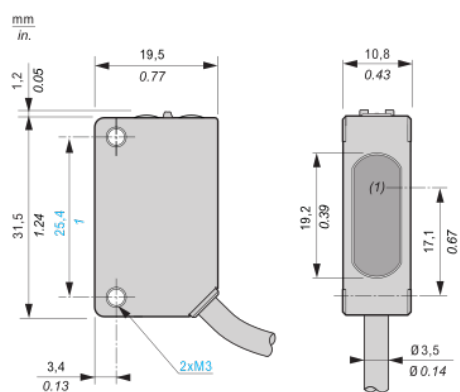

(1) : Transmission

### Receiver

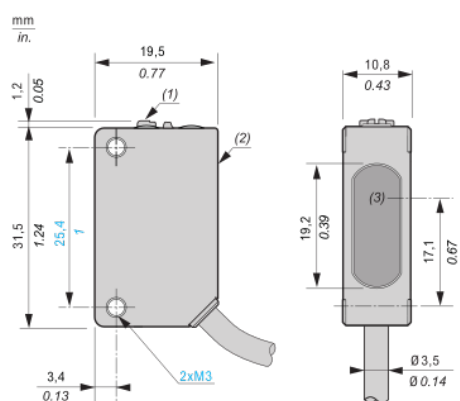


(1) : Setting potentiometer (sensitivity)

(2) : Setting potentiometer (output)

(3) : Reception

## Connection and schema

### Wiring diagram

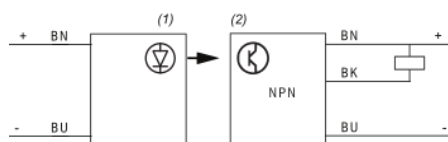

BN (Brown): (+)

BK (Black): OUT/Output



BU (Blue): (-)

(1): Transmitter

(2): Receiver

## Detection curves

### Lateral displacement

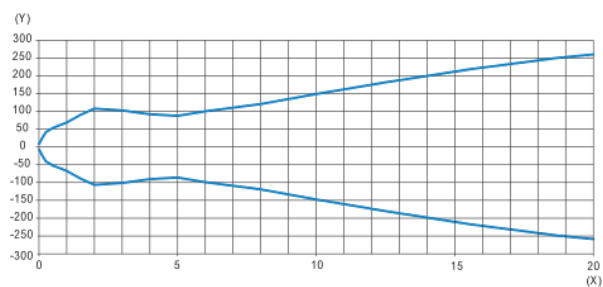


(1): Transmitter

(2): Receiver

(X): Sensing distance (m)

(Y): Lateral displacement (mm)


### Light beam diameter

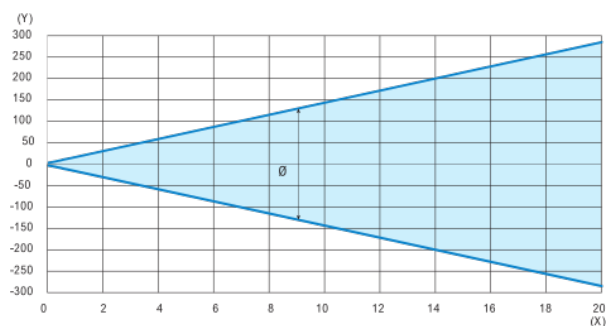

(X): Sensing distance (m)

(Y): Light beam diameter (mm)

### Excess gain

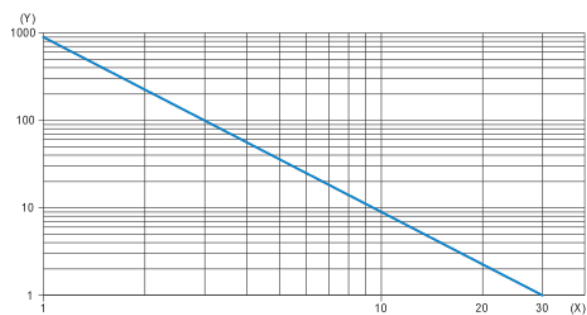

(X): Sensing distance (m)

(Y): Excess gain