

Product data sheet Characteristics

ZB5AK1513

Head for illuminated selector switch, Harmony XB5, dark grey plastic, white handle, 22mm, universal LED, 3 positions,



Important message: A change in appearance may be noted on the product but does not affect its use in terms of function and safety. This makes it compatible with our Universal LED blocks Local distributor code: 237223472 EAN Code: 3389110138047



Main

Main	
Range of product	Harmony XB5
Product or component type	Head for illuminated selector switch
Product compatibility	Universal LED
Device short name	ZB5
Bezel material	Dark grey plastic
Mounting diameter	22 mm
Head type	Standard
Sale per indivisible quantity	1
Shape of signaling unit head	Round
Type of operator	To centre spring return
Operator profile	White standard handle
Operator position infor- mation	3 positions +/- 45°

Complementary

Device presentation	Basic element
	M10 for <2 contacts using single blocks in front mounting with integral LED MF1 for <2 contacts using single blocks in front mounting with integral LED MR1 for <2 contacts using single blocks in rear mounting with integral LED M4 for <4 contacts using single and double blocks in front mounting with integral LED
Electrical composition code	M3 for <4 contacts using single blocks in front mounting with integral LED M6 for <2 contacts using single blocks in front mounting with integral LED and transformer
Station name	XALD 15 cut-outs XALK 25 cut-outs
Mechanical durability	500000 cycles
Net weight	0.016 kg
CAD overall depth	43 mm
CAD overall height	29 mm
CAD overall width	29 mm

Environment

Protective treatment	TH				
Ambient air temperature for storage	-4070 °C				
Ambient air temperature for operation	-4070 °C				
Overvoltage category	Class II conforming to IEC 60536				
IP degree of protection	IP66 conforming to IEC 60529 IP67 IP69 IP69K				
NEMA degree of protection	NEMA 13 NEMA 4X				
Resistance to high pressure washer	7000000 Pa at 55 °C, distance : 0.1 m				
IK degree of protection	IK04 conforming to IEC 50102				
Standards	EN/IEC 60947-5-4 CSA C22.2 No 14 EN/IEC 60947-5-1 JIS C8201-5-1 EN/IEC 60947-5-5 EN/IEC 60947-1 UL 508 JIS C8201-1				
Product certifications	CSA[RETURN]BV[RETURN]LROS (Lloyds register of ship- ping)[RETURN]DNV[RETURN]UL listed[RETURN]GL				
Vibration resistance	5 gn (f= 2500 Hz) conforming to IEC 60068-2-6				
Shock resistance	30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27 50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27				

Packing Units

J	
Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.5 cm
Package 1 Width	5.4 cm
Package 1 Length	6 cm
Package 1 Weight	24 g
Unit Type of Package 2	S03
Number of Units in Package 2	200
Package 2 Height	30 cm
Package 2 Width	30 cm
Package 2 Length	40 cm
Package 2 Weight	5.286 kg

Offer Sustainability


Sustainable offer status	Green Premium product				
REACh Regulation	REACh Declaration				
REACh free of SVHC	Yes				
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) CEU RoHS Decla- ration				
Toxic heavy metal free	Yes				
Mercury free	Yes				
China RoHS Regulation	China RoHS Declaration				
RoHS exemption information	₽ Yes				
Environmental Disclosure	Product Environmental Profile				
Circularity Profile	Part of Life Information				

Warranty

18 months

ZB5AK1513

Dimensions






ZB5AK1513

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board




(1) Diameter on finished panel or support

(2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.

(3) Ø22.5 mm recommended (Ø22.3 $_{0}^{+0.4}$) / Ø0.89 in. recommended (Ø0.88 in. $_{0}^{+0.016}$)

Connections	a in mm	a in in.	b in mm	b in in.
By screw clamp terminals or plug-in connector	40	1.57	30	1.18
By Faston connectors	45	1.77	32	1.26
On printed circuit board	30	1.18	30	1.18

Detail of Lug Recess




(1) Diameter on finished panel or support

(2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.

(3) Ø22.5 mm recommended (Ø22.3 $_0^{+0.4}$) / Ø0.89 in. recommended (Ø0.88 in. $_0^{+0.016}$)

Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection

Panel Cut-outs (Viewed from Installer's Side)

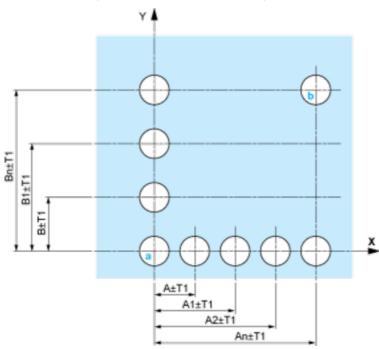


A: 30 mm min. / 1.18 in. min.


B: 40 mm min. / 1.57 in. min.

Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm

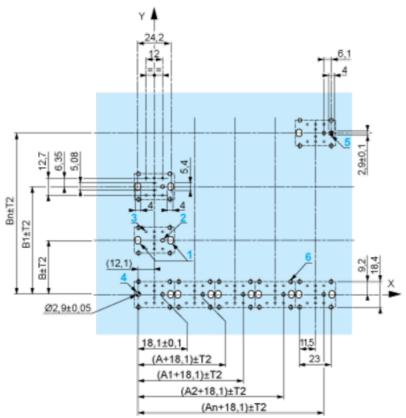

A: 30 mm min. B: 40 mm min. Dimensions in in.

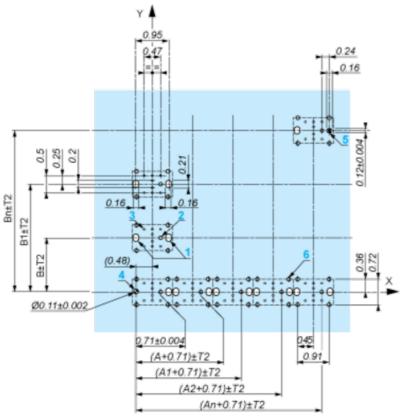

A: 1.18 in. min.

B: 1.57 in. min.


General Tolerances of the Panel and Printed Circuit Board

The cumulative tolerance must not exceed 0.3 mm / 0.012 in.: T1 + T2 = 0.3 mm max.

Installation Precautions

- Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB5AZ009: ± 2°30' (excluding cut-outs marked a and b).
- Tightening torque of screws ZBZ006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB5AZ079 fixing collar/pillar and its fixing screws:
 - $\circ~$ every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
 - with each selector switch head (ZB5AD•, ZB5AJ•, ZB5AG•).

The fixing centers marked a and b are diagonally opposed and must align with those marked 4 and 5.



(4) Printed circuit board

Mounting of Adapter (Socket) ZBZ01•


- 1 2 elongated holes for ZBZ006 screw access
- 2 1 hole Ø 2.4 mm \pm 0.05 / 0.09 in. \pm 0.002 for centring adapter ZBZ01•
- 38 × Ø 1.2 mm / 0.05 in. holes
- 4 1 hole Ø 2.9 mm ± 0.05 / 0.11 in. ± 0.002, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- 6 4 holes Ø 2.4 mm / 0.09 in. for clipping in adapter ZBZ01•

Dimensions An + 18.1 relate to the Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 holes for centring adapter ZBZ01•.


Product data sheet Technical Description

ZB5AK1513


Electrical Composition Corresponding to Code M3



Electrical Composition Corresponding to Code M4



Electrical Composition Corresponding to Codes M6 and P2



Electrical Composition Corresponding to Codes M5, M10, MF1, MR1 and MF2



Legend

Single contact

Double contact

Light block

Possible location

Sequence of Contacts Fitted to 3-position Selector Switch Body

Position 315°



Push	Position	Тор			
Bottom		\bigtriangleup			
Location		Left	Right		
State		1	0		
Contacts	N/O		closed	open	
N/C		open	closed		-

Position 0°



Push	Position	Тор		Π	
				\otimes	
Bottom	\bigtriangleup	\bigtriangleup			
Location		Left	Right		
State		0	0		
Contacts	N/O		open	open	
N/C		closed	closed		

Position 45°



Push	Position	Тор			
Bottom	\bigtriangleup				
Location		Left	Right		
State		0	1		
Contacts	N/O		open	closed	
N/C		closed	open		-