

Product data sheet

Characteristics

XACB6935

pendant control station XAC-B - 6 pushbuttons
+ 1 Emergency stop



Main

Range of product	Harmony XAC
Product or component type	Pendant control station
Device short name	XACB

Complementary

Enclosure material	Glass reinforced polyester
Electrical circuit type	Power circuit
Enclosure type	Ready for use enclosure
Control station application	Control of single speed hoist motor
Control station composition	6 push-buttons + 1 emergency stop
Control button type	Emergency stop push-button Ø 40 mm 3 NC trigger action First push-button 3-pole raise, slow Second push-button 3-pole lower, slow Fourth push-button 3-pole left, slow Third push-button 3-pole right, slow Fifth push-button 3-pole forward slow Sixth push-button 3-pole reverse, slow
Product compatibility	XESD2201 for reversing operation XACS3991 for emergency stop
Mechanical interlocking	With mechanical interlocking between pairs
Control station colour	Yellow
Connections - terminals	Screw clamp terminals, 1 x 2.5 mm ² with or without cable end Screw clamp terminals, 2 x 1.5 mm ² with or without cable end
Standards	CSA C22.2 No 14 EN/ISO 13850: 2006 EN/IEC 60947-5-1 EN/IEC 60204-32 EN/IEC 60947-5-5
Product certifications	CSA
Protective treatment	TH
Ambient air temperature for operation	-25...70 °C
Ambient air temperature for storage	-40...70 °C
Vibration resistance	15 gn (f= 10...500 Hz) conforming to IEC 60068-2-6
Shock resistance	100 gn conforming to IEC 60068-2-27
Overvoltage category	Class II conforming to IEC 61140
IP degree of protection	IP65 conforming to IEC 60529
IK degree of protection	IK08
Mechanical durability	1000000 cycles
Cable entry	Rubber sleeve with stepped entry 10...22 mm
[Ithe] conventional enclosed thermal current	20 A


[Ui] rated insulation voltage	Emergency stop contact: 400 V (pollution degree 3) conforming to IEC 60947-1 300 V conforming to CSA
[Uimp] rated impulse withstand voltage	6 kV conforming to IEC 60947-1
Contact operation	Snap action
Operating force	32 N push-button 40 N emergency stop
Short-circuit protection	12 A fuse protection by cartridge fuse type aM
Rated power in hp	3 hp at 240 V
Rated operational power in W	3000 W at 240 V 3000 W at 400 V
Electrical durability	1000000 Cycles AC-3, 3000 W at 400 V, operating rate <10 cyc/mn, load factor = 0.4 conforming to IEC 60947-3 appendix A 1000000 Cycles AC-4, 3000 W at 400 V, operating rate <10 cyc/mn, load factor = 0.4 conforming to IEC 60947-3 appendix A 700000 Cycles AC-3, 3000 W at 240 V, operating rate <10 cyc/mn, load factor = 0.4 conforming to IEC 60947-3 appendix A 700000 cycles AC-4, 3000 W at 240 V, operating rate <10 cyc/mn, load factor = 0.4 conforming to IEC 60947-3 appendix A
Terminals description ISO n°1	(23-24)NO (63-64)NO (53-54)NO (33-34)NO (13-14)NO (73-74)NO
Terminals description ISO n°2	(31-32)NC (21-22)NC (11-12)NC
Terminal identifier	(13-14)NO (11-12)NC
Net weight	1.61 kg

Offer Sustainability

REACH Regulation	 REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	 China RoHS Declaration
RoHS exemption information	 Yes
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions

Below drawing shows a product with 6 cut-outs. Select the number of cut-outs according to the product characteristics in order to get b, b1 and c dimensions.

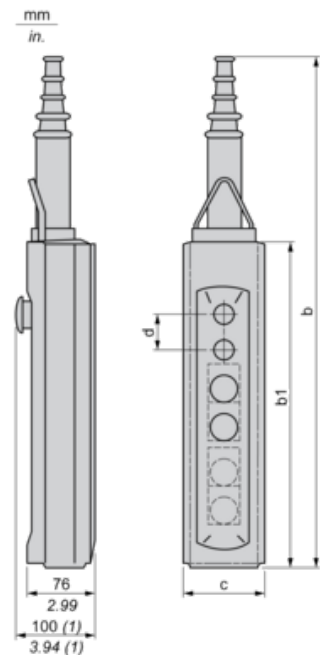

(1) With mushroom head operator


Dimensions in mm

Number of cut-outs	2	4	6	8	12
b	409	499	589	679	679
b1	220	310	400	490	490
c	98	98	98	98	98
d	40	40	40	40	30

Dimensions in in.

Number of cut-outs	2	4	6	8	12
b	16.10	19.64	23.19	26.73	26.73
b1	8.66	12.20	15.75	19.29	19.29
c	3.86	3.86	3.86	3.86	3.86
d	1.57	1.57	1.57	1.57	1.18


Protective cable sleeves



(1) Internal ø

Protective Guard

Dimensions



Control of Single-Speed Reversing Motor 3-Phase switching, Reversing by 2-Phase Inversion

With XESD2201 contact block, to be ordered separately

