

Product data sheet Characteristics

ZB5AP183

white flush pushbutton head Ø22 spring return unmarked





Main

Range of product	Harmony XB5
Product or component type	Head for non-illuminated push-button
Device short name	ZB5
Product compatibility	Legend holder
Bezel material	Dark grey plastic
Mounting diameter	22 mm
Head type	Standard
Sale per indivisible quantity	1
Shape of signaling unit head	Round
Type of operator	Spring return
Operator profile	White flush, unmarked
Operator additional information	Clear membrane for insertion of protected legend within head

Complementary

CAD overall width	30 mm	
CAD overall height	30 mm	
CAD overall depth	35 mm	
Net weight	0.023 kg	
Mechanical durability	10000000 cycles	
Station name	XALD 15 cut-outs XALK 25 cut-outs	
Electrical composition code	C3 for <6 contacts using single blocks in front mounting C4 for <6 contacts using single and double blocks in front mounting C14 for <2 contacts using single blocks in front mounting SF2 for <2 contacts using single blocks in front mounting SR2 for <2 contacts using single blocks in rear mounting	
Device presentation	Basic element	

Environment

Protective treatment	TH	
Ambient air temperature for storage	-4070 °C	
Ambient air temperature for operation	-4070 °C	
Overvoltage category	Class II conforming to IEC 60536	
IP degree of protection	IP66 conforming to IEC 60529 IP67 conforming to IEC 60529 IP69 conforming to IEC 60529 IP69K conforming to ISO 20653	
NEMA degree of protection	NEMA 13 NEMA 4X	
Resistance to high pressure washer	7000000 Pa at 55 °C, distance : 0.1 m	
IK degree of protection	IK03 conforming to IEC 50102	
Product certifications	CSA[RETURN]LROS (Lloyds register of shipping) [RETURN]DNV[RETURN]GL[RETURN]UL listed[RETURN]BV	

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not inherent or and is not to be used for determining suitability or inhability of these products for specific user applications. It is the dourn aren in integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Shock resistance	30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27 50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27
Vibration resistance	5 gn (f= 2500 Hz) conforming to IEC 60068-2-6

Packing Units

PCE	
1	
8.8 cm	
3.4 cm	
5.4 cm	
23.0 g	
	1 8.8 cm 3.4 cm 5.4 cm

Offer Sustainability


Sustainable offer status	Green Premium product	
REACh Regulation	☑ REACh Declaration	
REACh free of SVHC	Yes	
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)	
Mercury free	Yes	
China RoHS Regulation	☑ China RoHS Declaration	
RoHS exemption information	₽¥Yes	
Environmental Disclosure	Product Environmental Profile	
Circularity Profile	End Of Life Information	

Contractual warranty

Warranty 18 months

ZB5AP183


Dimensions



	a in mm	a in in.
ZB5AP••	36.5	1.44
ZB5AP•S	33	1.30
ZB5AP•83	32	1.26
ZB5AP•	35	1.38

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)


Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board



- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3) Ø22.5 mm recommended (Ø22.3 $_0$ ^{+0.4}) / Ø0.89 in. recommended (Ø0.88 in. $_0$ ^{+0.016})

Connections	a in mm	a in in.	b in mm	b in in.
By screw clamp terminals or plug-in connector	40	1.57	30	1.18
By Faston connectors	45	1.77	32	1.26
On printed circuit board	30	1.18	30	1.18


Detail of Lug Recess



- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3) Ø22.5 mm recommended (Ø22.3 $_0$ ^{+0.4}) / Ø0.89 in. recommended (Ø0.88 in. $_0$ ^{+0.016})

Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection

Panel Cut-outs (Viewed from Installer's Side)

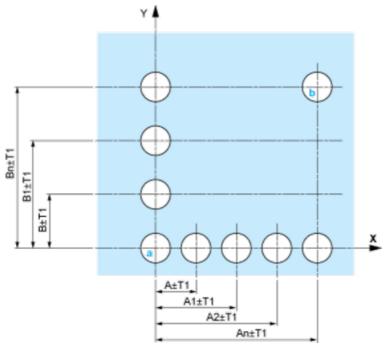


A: 30 mm min. / 1.18 in. min.

B: 40 mm min. / 1.57 in. min.

Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm

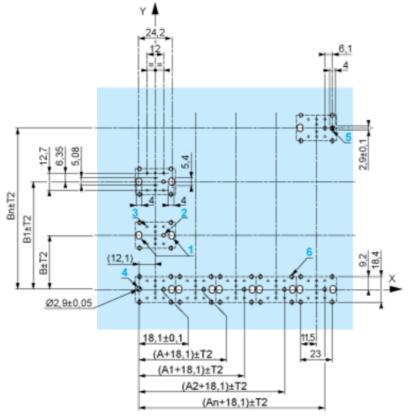

A: 30 mm min.

B: 40 mm min.

Dimensions in in.



A: 1.18 in. min. B: 1.57 in. min.

General Tolerances of the Panel and Printed Circuit Board

The cumulative tolerance must not exceed 0.3 mm / 0.012 in.: T1 + T2 = 0.3 mm max.

Installation Precautions

- Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB5AZ009: ± 2°30' (excluding cut-outs marked a and b).
- Tightening torque of screws ZBZ006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB5AZ079 fixing collar/pillar and its fixing screws:
 - $\circ \quad$ every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
 - o with each selector switch head (ZB5AD•, ZB5AJ•, ZB5AG•).

The fixing centers marked a and b are diagonally opposed and must align with those marked 4 and 5.



- (1) Head ZB5AD•
- (2) Panel
- (2) Nut

Mounting of Adapter (Socket) ZBZ01•

- 1 2 elongated holes for ZBZ006 screw access
- 2 1 hole Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 for centring adapter ZBZ01•
- 3 8 × Ø 1.2 mm / 0.05 in. holes
- 4 1 hole Ø 2.9 mm ± 0.05 / 0.11 in. ± 0.002, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- 6 4 holes Ø 2.4 mm / 0.09 in. for clipping in adapter ZBZ01•

Dimensions An + 18.1 relate to the Ø 2.4 mm \pm 0.05 / 0.09 in. \pm 0.002 holes for centring adapter ZBZ01•.

ZB5AP183

Electrical Composition Corresponding to Code C3
Electrical Composition Corresponding to Code C4
Electrical Composition Corresponding to Codes C14, SF2 and SR2
Electrical Composition Corresponding to Codes C14, SF2 and SR2
Legend
Single contact
Double contact

Light block

Possible location

