

## Product data sheet Characteristics

## ZB5CA2912

black square flush pushbutton head Ø22 spring return "up arrow"





## Main

Range of product	Harmony XB5
Product or component type	Head for non-illuminated push-button
Device short name	ZB5
Bezel material	Dark grey plastic
Mounting diameter	22 mm
Head type	Standard
Sale per indivisible quantity	1
Shape of signaling unit head	Square
Type of operator	Spring return
Operator profile	Black flush, up arrow (white)

#### Complementary

Device presentation	Basic element
	SR1 for <3 contacts using single blocks in front mounting
	C15 for <1 contacts using single blocks in front mounting SF1 for <3 contacts using single blocks in front mounting
	C11 for <3 contacts using single blocks in front mounting
	C2 for <9 contacts using single and double blocks in front mounting
Electrical composition code	C1 for <9 contacts using single blocks in front mounting
	XALK 25 cut-outs
Station name	XALD 15 cut-outs
Mechanical durability	5000000 cycles
Net weight	0.019 kg
CAD overall depth	28 mm
CAD overall height	30 mm
CAD overall width	30 mm

#### Environment

Protective treatment	TH
Ambient air temperature for storage	-4070 °C
Ambient air temperature for operation	-2570 °C
Overvoltage category	Class II conforming to IEC 60536
IP degree of protection	IP66 conforming to IEC 60529
NEMA degree of protection	NEMA 13 NEMA 4X
Resistance to high pressure washer	7000000 Pa at 55 °C, distance : 0.1 m
IK degree of protection	IK03 conforming to IEC 50102
Product certifications	GL[RETURN]BV[RETURN]LROS (Lloyds register of shipping) [RETURN]CSA[RETURN]DNV[RETURN]UL listed
Shock resistance	30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27 50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27
Vibration resistance	5 gn (f= 2500 Hz) conforming to IEC 60068-2-6

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not inherent or and is not to be used for determining suitability or inhability of these products for specific user applications. It is the dourn aren in integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

### Packing Units

Unit Type of Package 1	PCE	
Number of Units in Package 1	1	
Package 1 Height	5.4 cm	
Package 1 Width	3.4 cm	
Package 1 Length	4.4 cm	
Package 1 Weight	19.0 g	

#### Offer Sustainability

Sustainable offer status	Green Premium product
REACh Regulation	☑ REACh Declaration
REACh free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS  Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	☑ China RoHS Declaration
RoHS exemption information	₫Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	☑ End Of Life Information


#### Contractual warranty

Warranty	18 months	
vvarranty	10 111011(113	

# Product data sheet Dimensions Drawings

## ZB5CA2912


#### **Dimensions**





#### Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)


Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board



- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3) Ø22.5 mm recommended (Ø22.3  $_0$  <sup>+0.4</sup>) / Ø0.89 in. recommended (Ø0.88 in.  $_0$  <sup>+0.016</sup>)

Connections	a in mm	a in in.	b in mm	b in in.
By screw clamp terminals or plug-in connector	40	1.57	30	1.18
By Faston connectors	45	1.77	32	1.26
On printed circuit board	30	1.18	30	1.18


#### **Detail of Lug Recess**



- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3) Ø22.5 mm recommended (Ø22.3  $_{0}$  <sup>+0.4</sup>) / Ø0.89 in. recommended (Ø0.88 in.  $_{0}$  <sup>+0.016</sup>)

Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection

#### Panel Cut-outs (Viewed from Installer's Side)

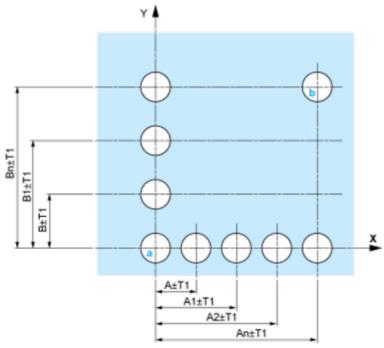


A: 30 mm min. / 1.18 in. min.

B: 40 mm min. / 1.57 in. min.

#### Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)


Dimensions in mm

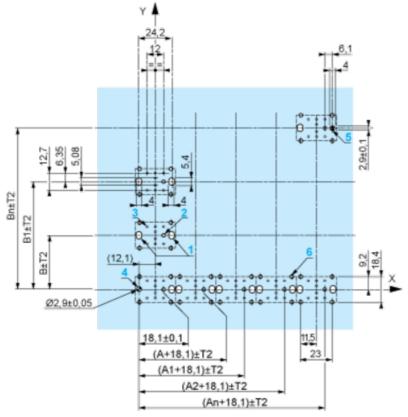

A: 30 mm min.

B: 40 mm min.

Dimensions in in.

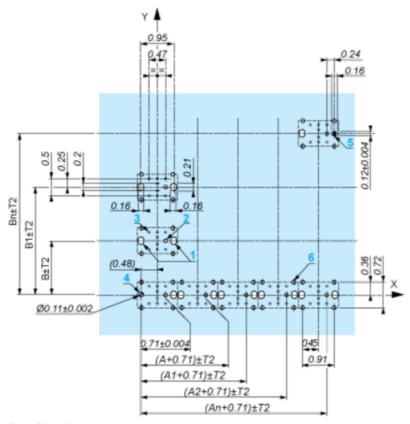

A: 1.18 in. min. B: 1.57 in. min.


#### General Tolerances of the Panel and Printed Circuit Board

The cumulative tolerance must not exceed 0.3 mm / 0.012 in.: T1 + T2 = 0.3 mm max.

#### **Installation Precautions**

- Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB5AZ009: ± 2°30' (excluding cut-outs marked a and b).
- Tightening torque of screws ZBZ006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB5AZ079 fixing collar/pillar and its fixing screws:
  - $\circ \quad$  every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
  - o with each selector switch head (ZB5AD•, ZB5AJ•, ZB5AG•).

The fixing centers marked a and b are diagonally opposed and must align with those marked 4 and 5.

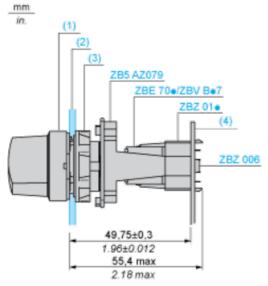

- (1) Head ZB5AD•
- (2) Panel
- (2) Nut

#### Mounting of Adapter (Socket) ZBZ01•

- 1 2 elongated holes for ZBZ006 screw access
- 2 1 hole Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 for centring adapter ZBZ01•
- 3 8 × Ø 1.2 mm / 0.05 in. holes
- 4 1 hole Ø 2.9 mm ± 0.05 / 0.11 in. ± 0.002, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- 6 4 holes Ø 2.4 mm / 0.09 in. for clipping in adapter ZBZ01•

Dimensions An + 18.1 relate to the Ø 2.4 mm  $\pm$  0.05 / 0.09 in.  $\pm$  0.002 holes for centring adapter ZBZ01•.

## ZB5CA2912

Electrical Composition Corresponding to Code C1
Electrical Composition Corresponding to Code C2
Floatrical Commonition Common and institute Codes CO. C44. CF4 and CD4
Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1
Electrical Composition Corresponding to Code C15
1 N/O
1 N/C
1 N/O + N/C or 1 N/O + N/O or 1 N/C + N/C

Legend		
Single contact		
Double contact		
Light block		
Possible location		