



Main

Range compatibility	Lexium 28
Product or component type	Servo motor
Device short name	BCH2

Complementary

Maximum mechanical speed	5000 rpm
[Us] rated supply voltage	220 V 110 V
Network number of phases	Three phase Single phase
Continuous stall current	0.81 A
Continuous stall torque	0.32 N.M for LXM26D at 0.9 A, 220 V, single phase 0.32 N.M for LXM26D at 0.9 A, 220 V, three phase 0.32 N.M for LXM28... at 0.9 A, 220 V, single phase 0.32 N.M for LXM28... at 0.9 A, 220 V, three phase 0.32 N.m for LXM28... at 1.8 A, 110 V, single phase
Continuous power	100 W
Peak stall torque	0.96 N.M for LXM26D at 0.9 A, 220 V, single phase 0.96 N.M for LXM26D at 0.9 A, 220 V, three phase 0.96 N.M for LXM28... at 0.9 A, 220 V, single phase 0.96 N.M for LXM28... at 0.9 A, 220 V, three phase 0.96 N.m for LXM28... at 1.8 A, 110 V, single phase
Nominal output power	100 W for LXM26D at 0.9 A, 220 V, single phase 100 W for LXM26D at 0.9 A, 220 V, three phase 100 W for LXM28... at 0.9 A, 220 V, single phase 100 W for LXM28... at 0.9 A, 220 V, three phase 100 W for LXM28... at 1.8 A, 110 V, single phase
Nominal torque	0.32 N.M for LXM26D at 0.9 A, 220 V, single phase 0.32 N.M for LXM26D at 0.9 A, 220 V, three phase 0.32 N.M for LXM28... at 0.9 A, 220 V, single phase 0.32 N.M for LXM28... at 0.9 A, 220 V, three phase 0.32 N.m for LXM28... at 1.8 A, 110 V, single phase
Nominal speed	3000 rpm for LXM26D at 0.9 A, 220 V, single phase 3000 rpm for LXM26D at 0.9 A, 220 V, three phase 3000 rpm for LXM28... at 0.9 A, 220 V, single phase 3000 rpm for LXM28... at 0.9 A, 220 V, three phase 3000 rpm for LXM28... at 1.8 A, 110 V, single phase
Maximum current Irms	2.65 A for LXM28... at 0.1 kW, 220 V 2.65 A for LXM28... at 0.1 kW, 110 V
Maximum permanent current	0.89 A
Product compatibility	LXM26D servo drive motor at 0.1 kW, 220 V, single phase LXM26D servo drive motor at 0.1 kW, 220 V, three phase LXM28... servo drive motor at 0.1 kW, 220 V, single phase LXM28... servo drive motor at 0.1 kW, 220 V, three phase LXM28... servo drive motor at 0.1 kW, 110 V, single phase

Shaft end	Keyed
Shaft diameter	8 mm
Shaft length	25 mm
Key width	3 mm
Feedback type	20 bits single turn absolute encoder
Holding brake	With
Holding torque	0.32 N.m built-in
Mounting support	Asian standard flange
Motor flange size	40 mm
Electrical connection	Free lead
Torque constant	0.4 N.m/A at 20 °C
Back emf constant	24 V/krpm at 20 °C
Rotor inertia	0.076 kg.cm ²
Stator resistance	23.4 Ohm at 20 °C
Stator inductance	20.6 mH at 20 °C
Stator electrical time constant	0.88 ms at 20 °C
Maximum radial force Fr	85 N at 3000 rpm
Maximum axial force Fa	40 N
Brake pull-in power	4.35 W
Type of cooling	Natural convection
Length	130 mm
Number of motor stacks	2
Centring collar diameter	30 mm
Centring collar depth	3 mm
Number of mounting holes	4
Mounting holes diameter	4.5 mm
Circle diameter of the mounting holes	46 mm
Distance shaft shoulder-flange	3 mm
Net weight	0.77 kg


Environment

IP degree of protection	IP50 IM V3 IP65 IM B5, IM V1
Ambient air temperature for operation	0...40 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	8.0 cm
Package 1 Width	13.0 cm
Package 1 Length	24.0 cm
Package 1 Weight	1.05 kg
Unit Type of Package 2	S02
Number of Units in Package 2	3
Package 2 Height	15.0 cm
Package 2 Width	30.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	3.156 kg


Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes

China RoHS Regulation	 China RoHS Declaration
RoHS exemption information	 Yes
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	 End Of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
PVC free	Yes

Dimensions


Dimensions of Motor

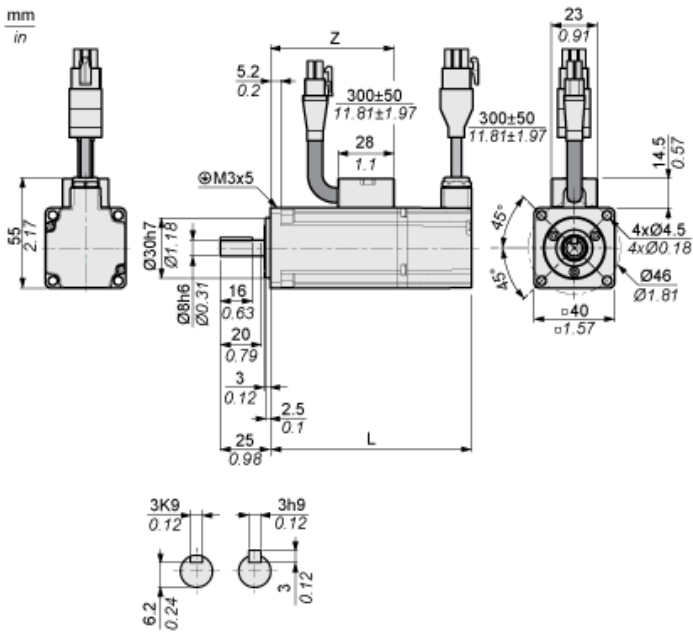

	mm	in.
L (without holding brake)	100	3.94
L (with holding brake)	130	5.12
Z	61.5	2.42

Torque/Speed Curves with 230 V Single/Three Phase Supply Voltage


Servo Motor without shaft sealing ring and LXM28AU01●●● Servo Drive

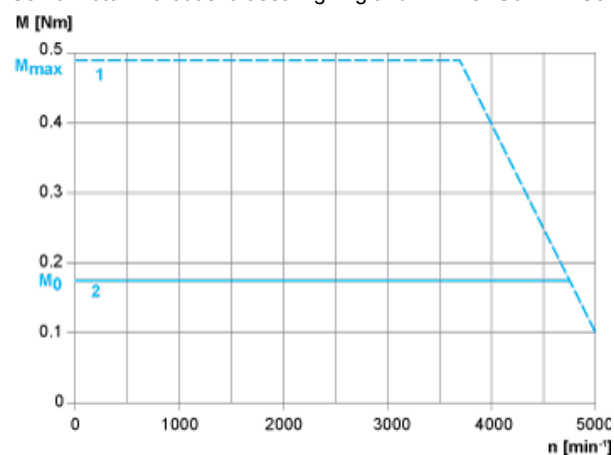

- 1 : Peak torque
2 : Continuous torque

Torque/Speed Curves with 230 V Single/Three Phase Supply Voltage

Servo Motor with shaft sealing ring and LXM28AU01●●● Servo Drive

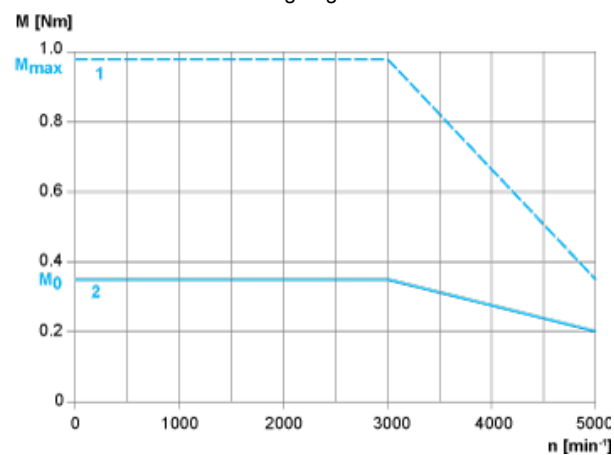

- 1 : Peak torque
2 : Continuous torque