

# XCMW139

Wireless limit switch XCMW - plastic roller 50 mm, lever



## Main

Range of Product	Telemecanique Limit switches XC Standard
Series name	Standard format
Product or Component Type	Wireless limit switch
Device short name	XCMW
Body type	Fixed
Head type	Rotary head

## Complementary

Body material	Plastic
Head material	Plastic
Lever material	Metal
Fixing Mode	By 2 screws
Type of operator	Spring return roller lever
Switch actuation	By 30° cam
Type of approach	Lateral approach, 2 directions
Communication network type	ZigBee green power 2.4 GHz IEEE 802.15.4
Electrical composition code	PW1
Emission Power	3 mW
Response Time	<= 2 ms
Maximum sensing distance	328.08 Ft (100 m) in free field 984.25 Ft (300 m) with external antenna 82.02 ft (25 m) in industrial environment
Contact operation	Snap action
Number of steps	1
Maximum force for tripping	50 N
Maximum torque for tripping	4.43 lbf.in (0.5 N.m)
Maximum actuation speed	0.33 ft/s (0.1 m/s)
Maximum operating rate	60 cyc/mn
Mechanical durability	400000 cycles
Switching operation per hour	3600
Width	1.18 in (30.0 mm)
Height	4.25 in (108 mm)
Depth	0.63 in (16.0 mm)
Net Weight	0.19 lb(US) (0.088 kg)

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither TWSS Holding nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Environment

Electromagnetic compatibility	Radiated emission Immunity for industrial environments Susceptibility to electromagnetic fields - test level: 3 V/m (80...2700 MHz, distance = 20 m) Susceptibility to electromagnetic fields - test level: 10 V/m (80...2000 MHz) Electrostatic discharge immunity test - test level: 6 kV (on contact (on metal parts)) Electrostatic discharge immunity test - test level: 8 kV (in free air (in insulating parts))
Shock resistance	50 gn 11 ms IEC 60068-2-27
Vibration resistance	25 gn 10...500 Hz)IEC 60068-2-6 +/- 10 mm 2...11 Hz)IEC 60068-2-6
IP degree of protection	IP65 conforming to IEC 60529
IK degree of protection	IK04 conforming to IEC 62262
Ambient Air Temperature for Operation	-13...131 °F (-25...55 °C)
Ambient Air Temperature for Storage	-40...158 °F (-40...70 °C)
Directives	2004/108/EC - electromagnetic compatibility 1999/5/EC - R&TTE directive
Standards	IEC 60947-1 IEC 60947-5-1
Radio agreement	IC RSS FCC RCM

## Ordering and shipping details

Category	US1000T22412
Discount Schedule	000T
GTIN	3389110000245
Returnability	No
Country of origin	FR


## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.26 in (3.2 cm)
Package 1 Width	1.85 in (4.7 cm)
Package 1 Length	5.00 in (12.7 cm)
Package 1 Weight	3.46 oz (98.0 g)

## Offer Sustainability


Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
For all Reach Rohs enquiries contact us at	<a href="mailto:sustainability@tesensors.com">sustainability@tesensors.com</a>

## Dimensions

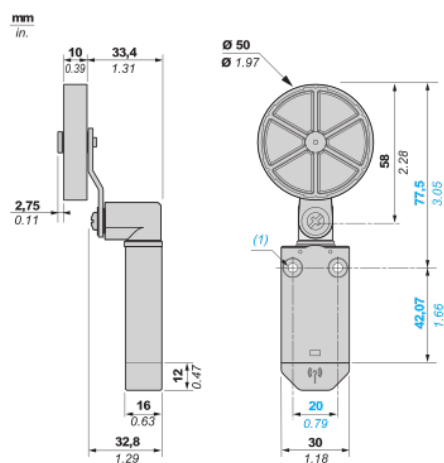

(1) : 2 fixing holes  $\varnothing 4.2$  mm ( $\varnothing 0.17$  in.)


## Screw Mounting



$$A = 1 \text{ Nm} \pm 0.1$$


$$A = 8.85 \text{ lb.in.} \pm 0.89$$

## Unobstructed Mounting

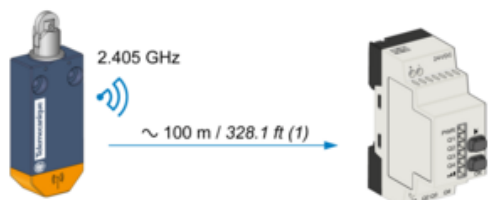


(1) : Typical values that may be modified by the application environment.

## Mounting in a Metal Cabinet

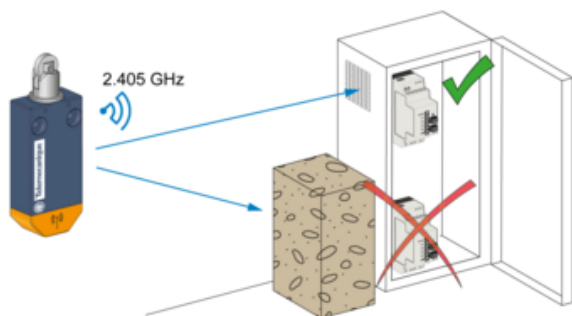

## Signal Attenuation According to the Material

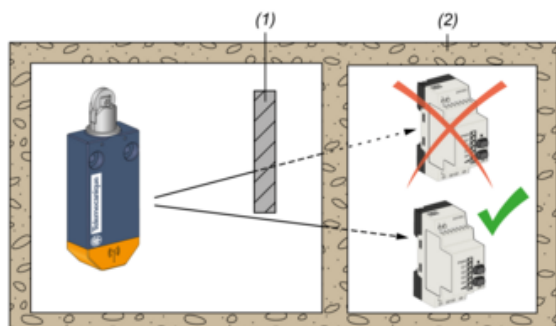

(1) : Metal structure

(2) : Wall


(3) : Values for indication purposes only

NOTE: Actual values depend on the thickness and nature of the material.

Material	Signal attenuation (%)
Glass window	10...20% (3)
Plaster wall	20...45% (3)
Brick wall	60% (3)
Concrete wall	70...80% (3)
Metal structure	50...100% (3)


## Mounting Tips for Antenna

### Optimized Installation

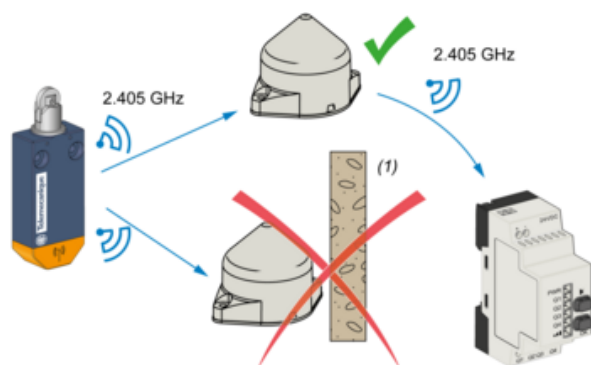


(1) : Obstacle

The Relay Antenna is used to Bypass an Obstacle and/or Increase the Range

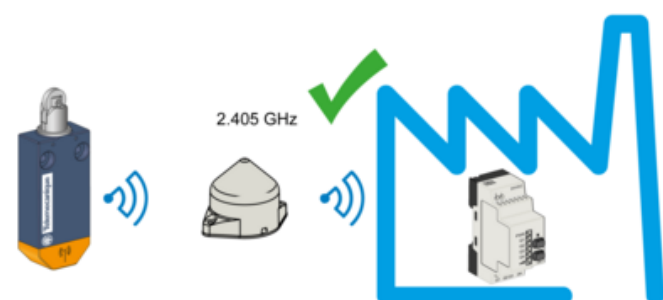


### Mounting with Roller Lever

## Recommended Mounting

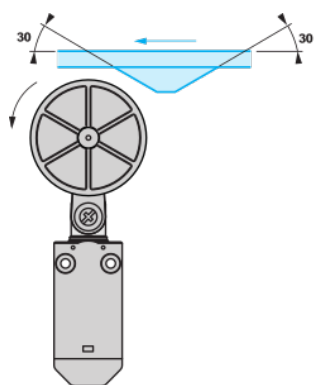


## Mounting to be Avoided

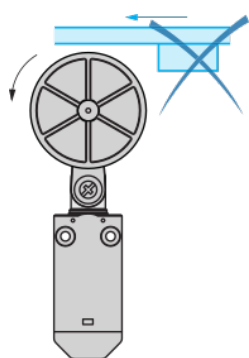

---

## Characteristics of Actuation

---




---

## Technical Description

---

### Functional Diagram, Travel Distance

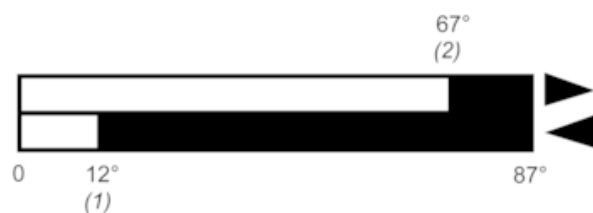

(1) : Reset

(2) : Set